


INSTALLATION NOTES

1. Set door speeds, force, time delay and verify proper door operation prior to final connection of sensors system.
2. Primary activation must be Knowing Act. If not then technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.
3. On Knowing Act applications, push/pull activation must be disabled.

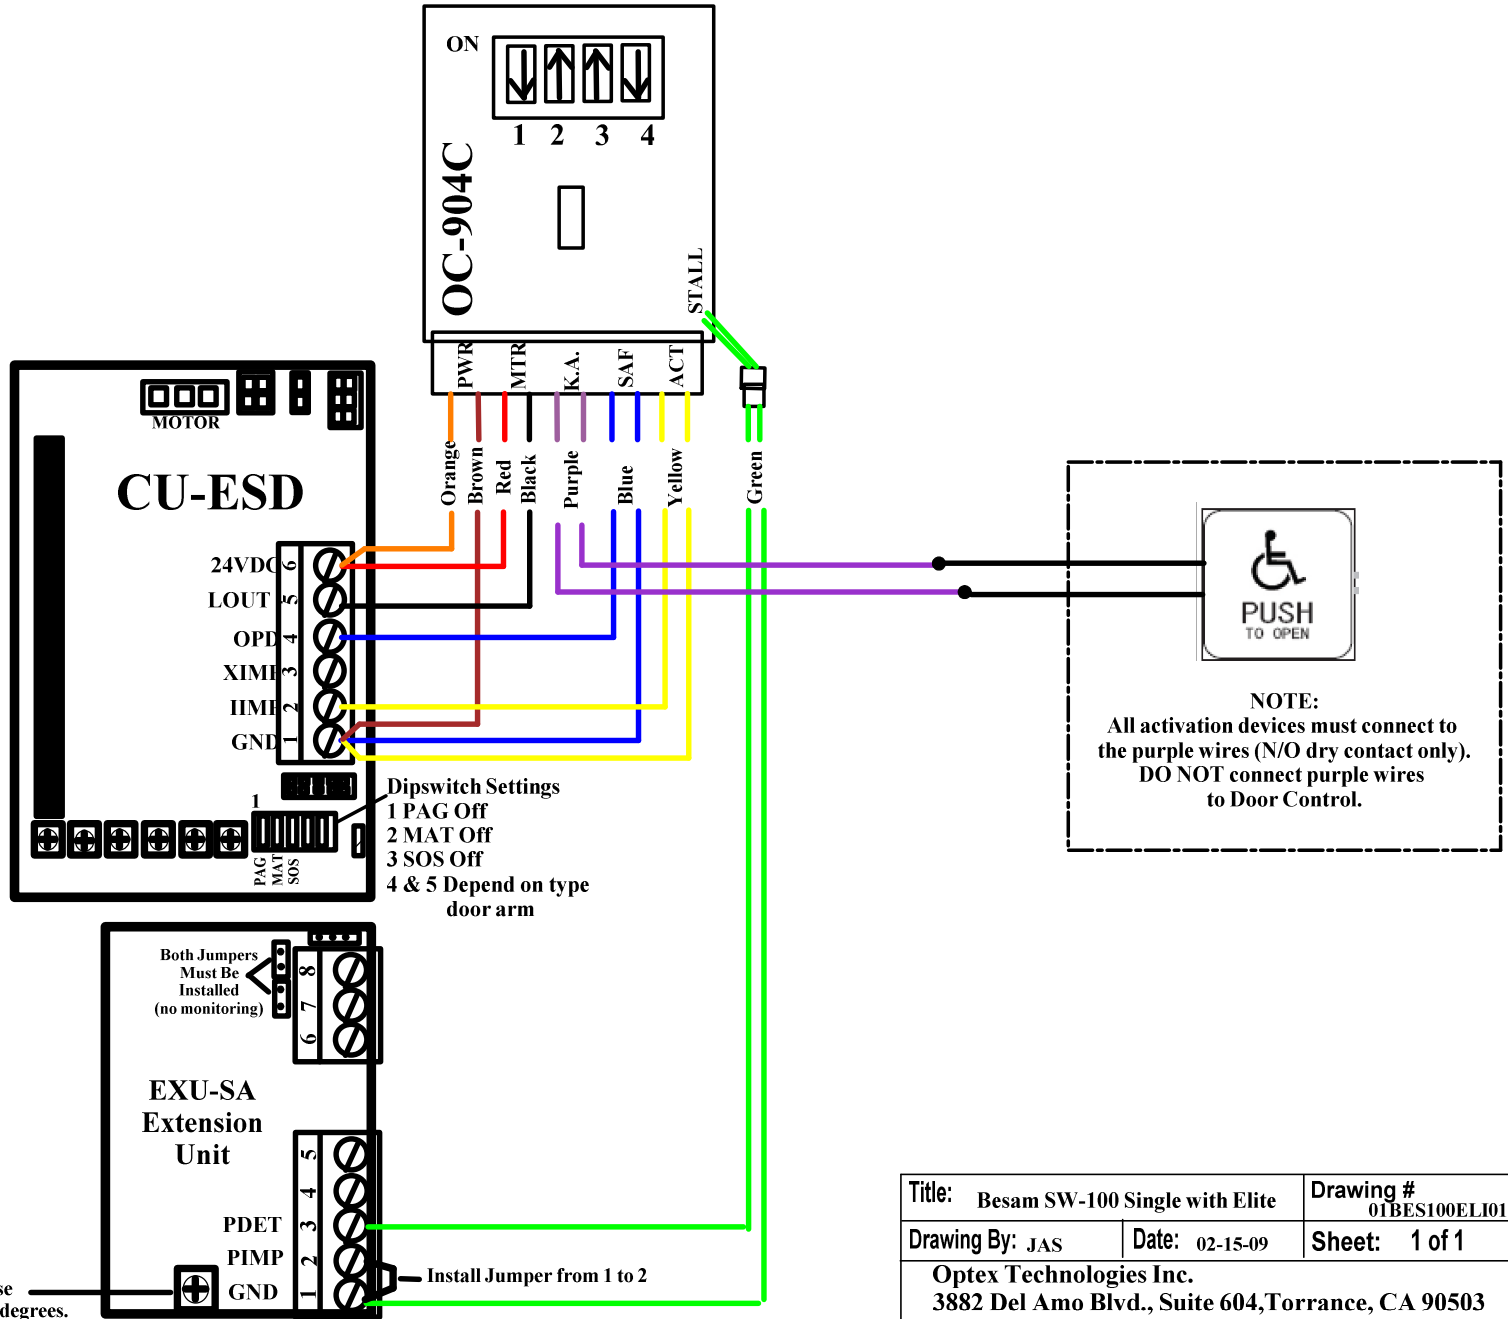

**Preliminary Drawing
Not Approved**

Set Blanking Pot fully clockwise for PDET input active thru 90 degrees.

| | |
|---|-------------------------|
| Title: Besam SW-100 Single with Elite | Drawing # 01BES100ELI01 |
| Drawing By: JAS | Date: 02-15-09 |
| Sheet: 1 of 1 | |
| Optex Technologies Inc. 3882 Del Amo Blvd., Suite 604, Torrance, CA 90503 Office: (800)877-6656, Fax: (310)214-8655 | |