


INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connections of sensors system.
2. Technician **MUST WALK TEST** to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.
3. Push/Pull Activation must be **DISABLED** at the Door Control

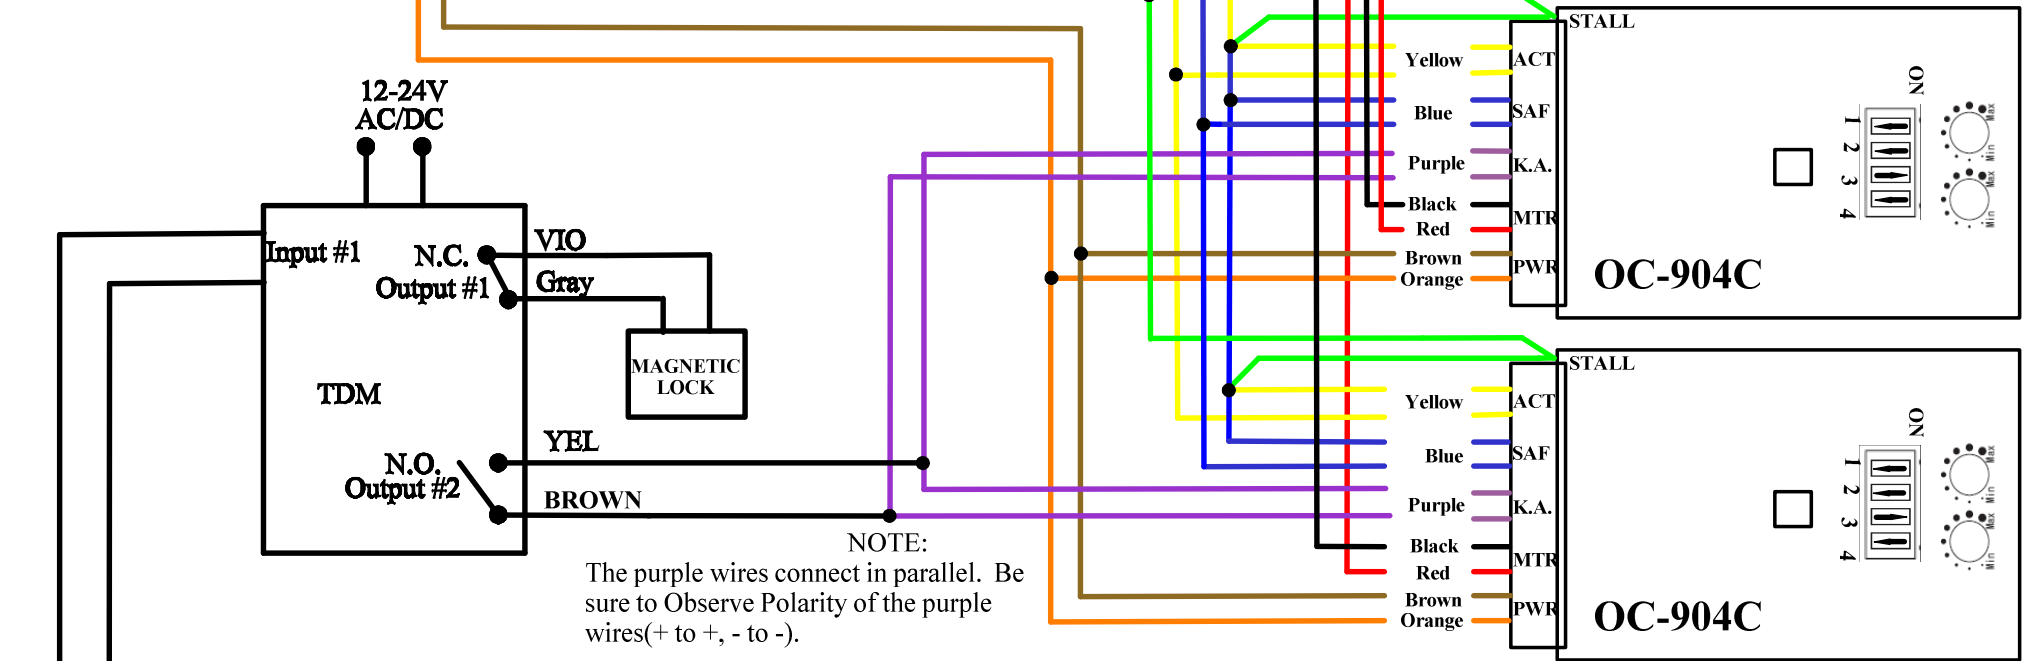

Title: Keane Monroe K Control, Simultaneous Pair with Elite & Magnetic Lock		Drawing # 01KEAKELI03
Drawing By: SDR	Date: 06-11-08	Sheet: 1 of 1
Optex Technologies Inc. 3882 Del Amo Blvd., Suite 604, Torrance, CA 90503 Office: (800)877-6656, Fax: (310)214-8655		