

Your Total Source for Automatic Door Safety

Low Energy Solutions

Regardless of your application, OPTEx has the sensor system for your low energy door. With our full line of Knowing Act Switches, reactivation sensors and presence safety devices, you can be confident we can provide you with the solution you need. Rely on OPTEx, your Total Source for Automatic Door Safety.

Option 1 – Reactivation Door Mounted

OA-Edge Sensor



The OA-Edge door mounted presence sensors utilize digital Infrared Triangulation Technology

SAM Module

Knowing Act Module is a Secondary Activation lockout module with a supplemental overhead presence lockout function

Air-Wave Touch-Free Door Switches

The Air-Wave Wireless Door Switch provides reliable touch-free activation of Low Energy and Knowing Act doors

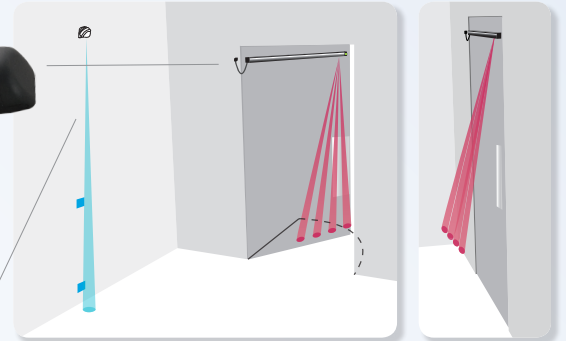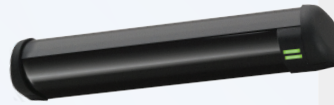

ORDERING INFO:

Qty	Item
1	OA-EDGE ONE
1	SAM Module*
2	Air-Wave Touch-Free Sensors

Option 2 – Reactivation Header Mounted

Reaction 2 Sensor


The Reaction 2 header mounted microwave sensor is specially designed to increase efficiency on all door types.

SAM Module

Knowing Act Module is a Secondary Activation lockout module with a supplemental overhead presence lockout function

Air-Wave Touch-Free Door Switches

The Air-Wave Wireless Door Switch provides reliable touch-free activation of Low Energy and Knowing Act doors

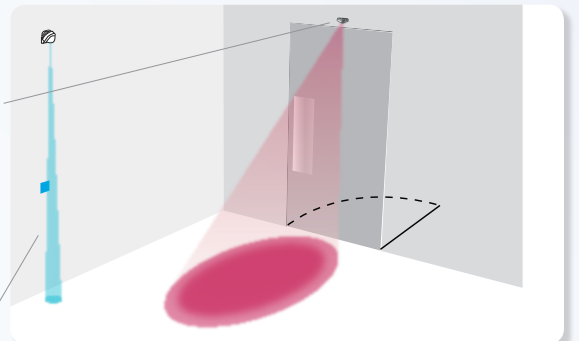

ORDERING INFO:

Qty	Item
1	REACTION 2
1	SAM Module*
2	Air-Wave Touch-Free Sensors


Option 3 – Swing Side Safety

ProSwing Premier Mk2 OR OA-601 Sensor

The ProSwing Premier Mk2 Swing Door Presence sensor detects moving or stationary people in the swingpath of the door. The OA-601 header mounted sensor assures the presence of a safety signal at the door control.

Air-Wave Touch-Free Door Switches

The Air-Wave Wireless Door Switch provides reliable touch-free activation of Low Energy and Knowing Act doors

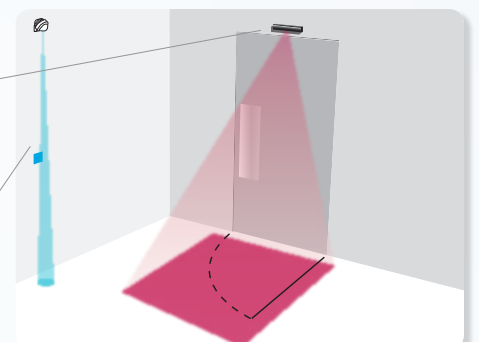

ORDERING INFO:

Qty	Item
1	PREMIER Mk2 or OA-601 Sensor
2	Air-Wave Touch-Free Sensors
1	Premier Mount or OA-601 Mount†

* SAM Module may not be necessary depending upon your operator. Call Tech Support if you are unsure.

† A mounting block may be necessary depending on your door's construction. Call Tech Support if you are unsure.



- **Touch-Free** – Eliminate cross-contamination point
- **All Conditions** – Indoor and outdoor use
- **Long Battery Life** – Two years*
- **Durability** – High mounting avoids damage from impact
- **Wireless** – Reduces the cost and hassle of hardwiring

* at 250 activations per day average

Ordering information	
Model #	Description
Air-Wave kit	2 Air-Wave TX transmitters, 1 Air-Wave RX receiver, and 2 Hand stickers
Air-Wave TX	Transmitter
Air-Wave RX	Receiver
Hand sticker	Chemical & scratch resistant sticker for hand activation
Foot sticker	Chemical & scratch resistant sticker for foot activation
TS-10U	Hand-held transmitter

Lockout Relays and Modules

Model #	Description
RLM	Lockout relay for OA-601 sensor
TDM	Dual Output Relay for multiple time delay uses such as interfacing electric locks and sequencing multiple doors
SAM	Knowing Act Module is a Secondary Activation lockout module with a supplemental overhead presence lockout function (ElectroMechanical Operators only).

Push Plates

Model #	Description
59 Series	4 1/2 in. square faceplate (P, H, HSS, W, WSS, Plain) Stainless Steel
59R4 Series	4 1/2 in. round faceplate (P, H, HSS, Plain) Stainless Steel
59R6 Series	6 in. round faceplate (P, H, HSS, Plain) Stainless Steel
608(1) (2)42	Bollard Post, Surface Mount with Switch (H, HSS, P and GR or BR)
608(1) (2)58	Bollard Post, In-Ground Mount with Switch (H, HSS, P and GR or BR)
608(1)T(2)42	Bollard Post, Surface Mount with Switch and Transmitter (H, HSS, P and GR or BR)
608(1)T(2)58	Bollard Post, In-Ground Mount with Switch (H, HSS, P and GR or BR)
59J Series	Jamb Mounted Switch (P, H, HSS, W, WSS) Stainless Steel
59V Series	Vestibule Switch 2-Face Plates (H, HSS, P)
CTP Series	Wireless Kit consisting of (2) 59 Switches, (2) CP/TX transmitters & Surface Mounting Boxes, (1) CP/RX Receiver (P, WSS, HSS, H)
CTP Vestibule	Wireless Vestibule Kit consisting of (2) 59 Switches, (2) CP/STX transmitters, (1) matching Vestibule Switch, (1) CP/TX-V & Surface Mount Box, (2) CP/RX Receivers (P, WSS, HSS, H)
CTP-R4 Series	Wireless Kit consisting of (2) 59R4 Switches, (2) CP/TX transmitters & Surface Mounting Boxes, (1) CP/RX Receiver (P, HSS, H)
CTP-R6 Series	Wireless Kit consisting of (2) 59R6 Switches, (2) CP/TX transmitters & Surface Mounting Boxes, (1) CP/RX Receiver (P, HSS, H)
RXM	ClearPath Plug-in Module Kit to field activate Mode 3 & 4
CP/TX	ClearPath Wall Mount Transmitter includes (1) 1015 box
CP/STX	ClearPath Sequencing Transmitter includes (1) 1015 box
CP/TX-J	ClearPath Jamb Style Transmitter includes (1) 1106-A box
CP/TX-R4	ClearPath Wall Mount Transmitter includes (1) 1025 box
CP/TX-R6	ClearPath Wall Mount Transmitter includes (1) 1030 box
CP/TX-V	ClearPath Dual Transmitter includes 1015 box
CP/TX-HH1	ClearPath 1 Button Handheld Micro-transmitter
CP/TX-HH2	ClearPath 2 Button Handheld Micro-transmitter
CP/RX	ClearPath Multi-Mode Receiver, Mode 1 & 2
1015	Weatherized Surface Mount Box (for 59 & 216 vestibule style switches)
1106-A	Weatherized Surface Mount Box (for 619 Series Jamb switches)
1106-B	Weatherized Surface Mount Box (for 216N Touchless switch)
1025	Round Boxes compatible with all 59R4 Series Switches
1030	Round Boxes compatible with all 59R6 Series Switches
217	Infrared Touchless Switch (4.5" Square Faceplate)
216-L	Infrared Touchless Switch (3" by 4.5" Square Faceplate)
216-N	Infrared Touchless Switch (Door Jamb Style Faceplate)
614-SS	1 in. Diameter Red Button Switch Grey, Double-Gang Cover
614-NSS	1 in. Diameter Red Button Switch Grey, Jamb Size Cover
730-A	DPDT Maintained Keyswitch w/4.5" Sq SS Face Plate (Fits Single & Dbl Gang Box)
730-AL	DPDT Maintained Keyswitch w/2.75" x 4.5" SS Face Plate (Fits Single Gang Box)
730-AN	DPDT Maintained Keyswitch w/1.75" x 4.5" SS Face Plate
730-B	DPDT Momentary Keyswitch w/4.5" Sq SS Face Plate (Fits Single & Dbl Gang Box)
730-BL	DPDT Momentary Keyswitch w/2.75" x 4.5" SS Face Plate (Fits Single Gang Box)
730-BN	DPDT Momentary Keyswitch w/ 1.75" x 4.5" SS Face Plate
730x-59J*	DPDT Maintained/Momentary Contact Keyswitch & 619-H/HSS/P Switch
	all versions: (x)A/B (*)H/HSS/P

Codes for plate styles:

- P- Press to Operate
- H-Blue Powder Coat Press to Operate with Handicap Symbol
- HSS- Stainless Steel Press to Operate with Handicap Symbol
- Plain- Stainless Steel Blank
- WSS- Stainless Steel Handicap Symbol Only
- GR-Gray (Bollard Post Only)
- BR-Bronze (Bollard Post Only)

Custom Finishes:

- U.S. 3 - Bright Brass
- U.S. 4 - Satin Brass
- U.S. 10 - Satin Bronze
- U.S. 10B - Antique Bronze
- U.S. 32 - Bright Stainless
- U.S. 32D - Satin Stainless

(Additional cost for custom finishes. Please call for quote.)



18730 S. Wilmington Ave, Unit 100
 Rancho Dominguez, CA 90220
 Ph 310 214-8644
 Fax 310 214-8655
 Toll free 800 877-6656
 www.ot-inc.com

Optex Technologies Inc.
 (East Coast Office)
 8510 McAlpine Park Dr.
 Suite 108
 Charlotte, NC 28211

