


NOTE:

1. All activating devices (push plates, card readers, sensors) must connect to the input of the TDM.
2. When using two OC-904 controllers (sim pair, double egress) the purple wires connect in parallel. Be sure to observe polarity (+ to +, - to -).

INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connection of sensors system.
2. Technician **MUST WALK TEST** to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.
3. MC-521 Safety Logic must be set to **SENSOR**.
4. When OC-904 is set to **Knowing Act** (dipswitch 3 on) Push/Pull activation must be **DISABLED** at the MC-521.
5. When using two OC-904's (sim pair, double Egress) connect both sets of wires in parallel to the connection points as shown below.

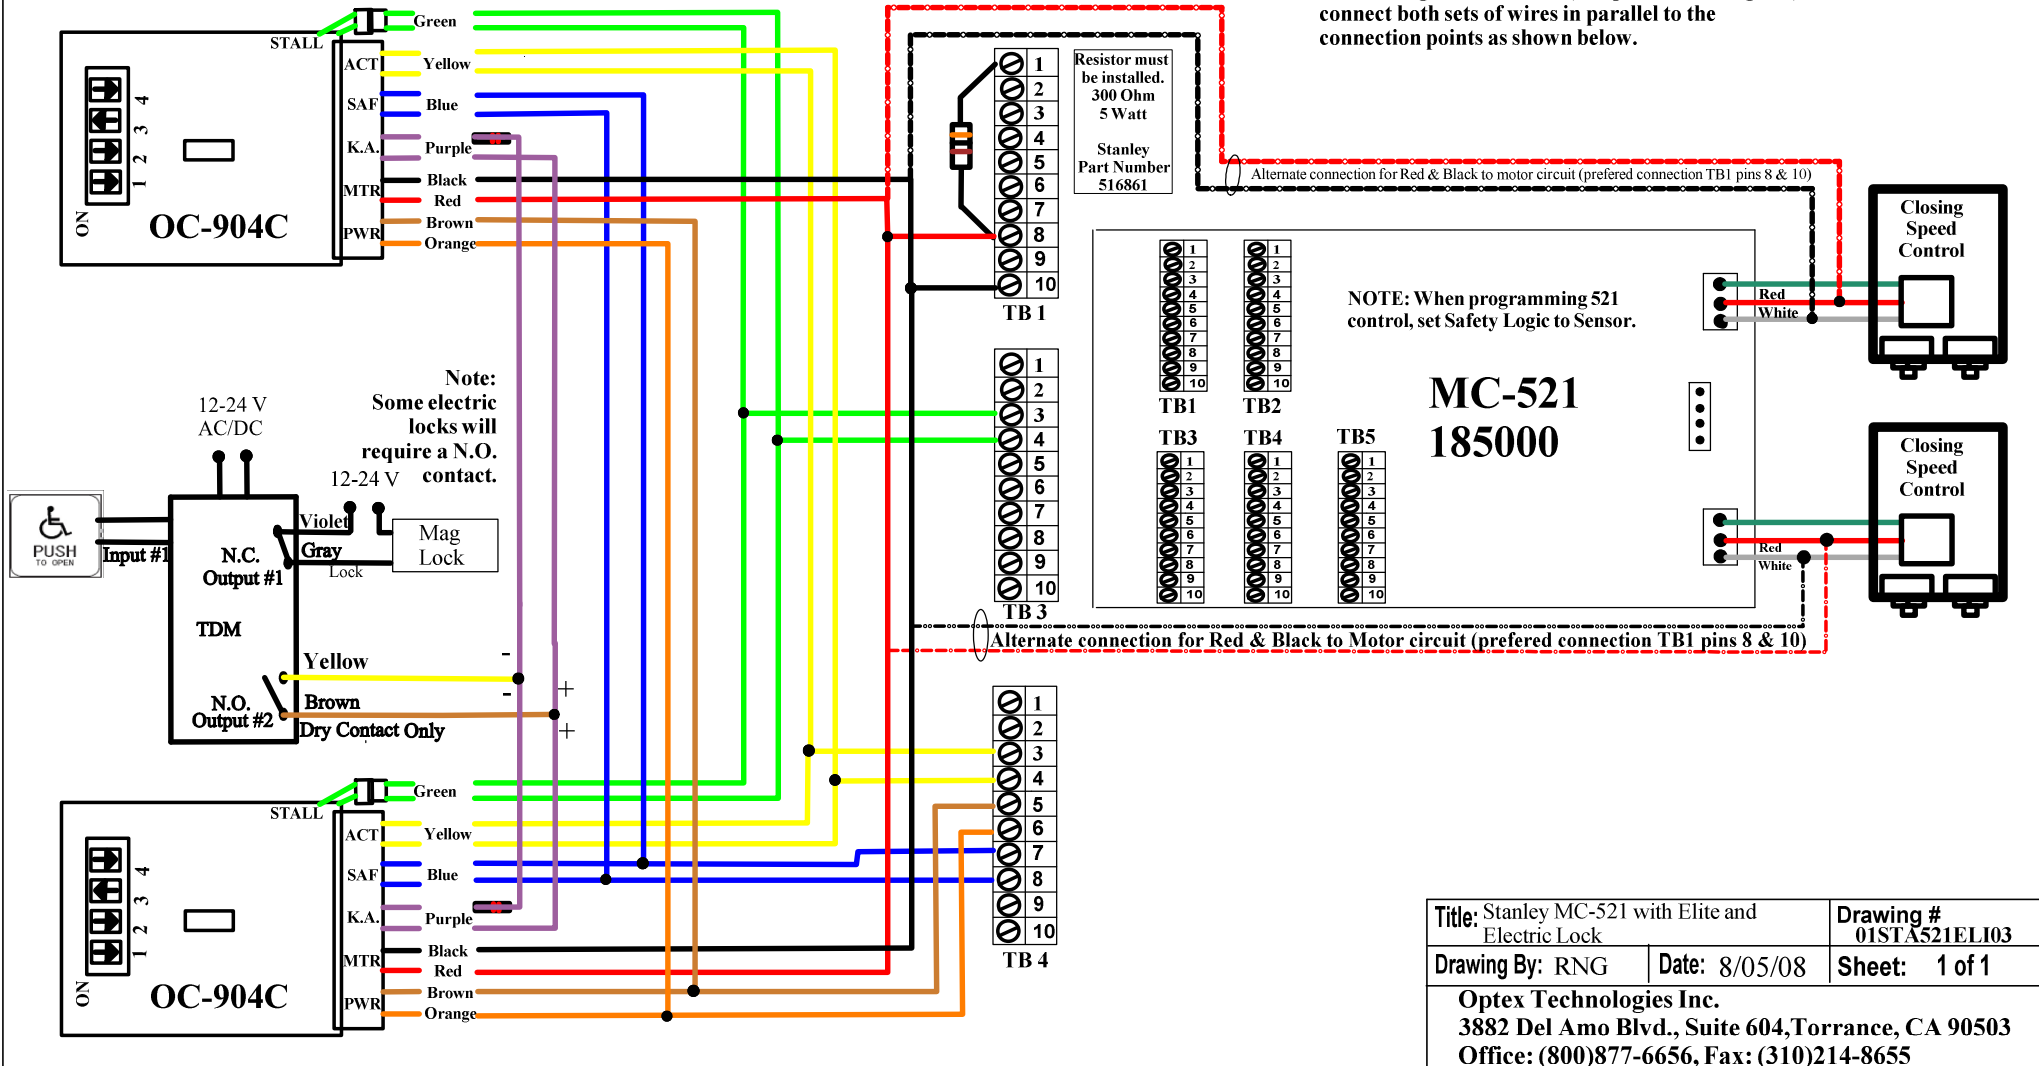

Title: Stanley MC-521 with Elite and Electric Lock		Drawing # 01STA521EL103
Drawing By: RNG	Date: 8/05/08	Sheet: 1 of 1
Optex Technologies Inc. 3882 Del Amo Blvd., Suite 604, Torrance, CA 90503 Office: (800)877-6656, Fax: (310)214-8655		